




**TYPE A**

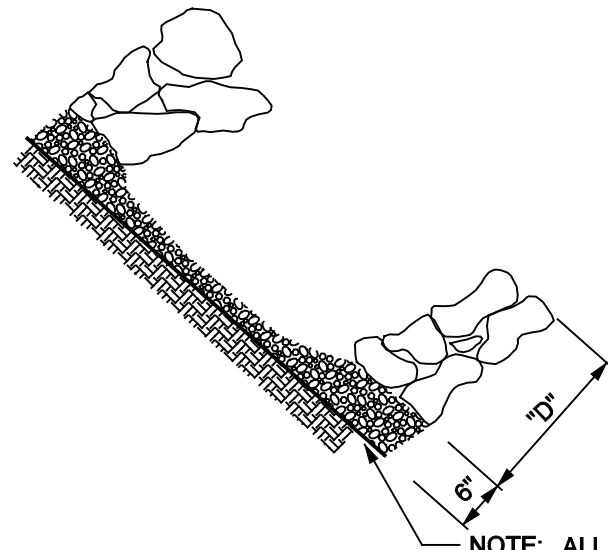

**TYPE B**

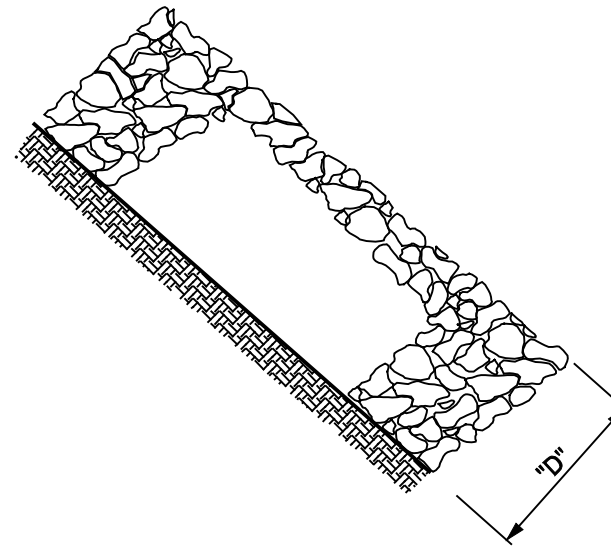

**TYPE C**

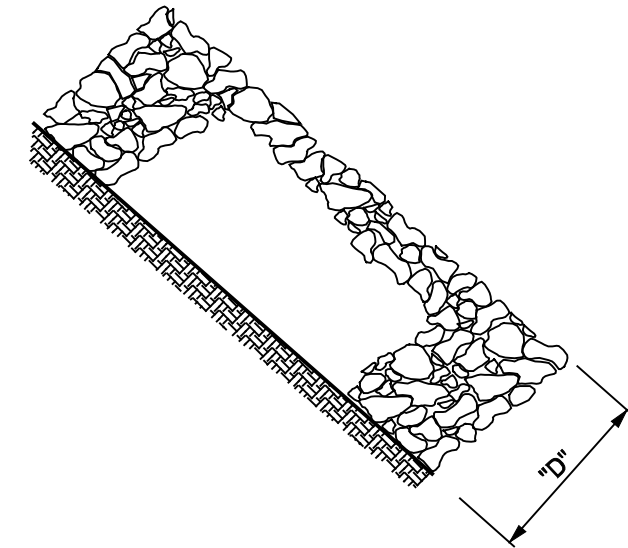

**NOTE:** ALL TYPES MAY BE PLACED WITH OR WITHOUT A 6 INCH BED OF NO. 3 OR 4 CRUSHED GRAVEL, STONE, OR SLAG AS SPECIFIED BY THE ENGINEER.

TYPE A SHALL CONSIST OF SIZES SUCH THAT AT LEAST 85 PERCENT OF THE TOTAL MATERIAL BY WEIGHT SHALL BE LARGER THAN AN 18-INCH SQUARE OPENING. THE MATERIAL SMALLER THAN AN 18-INCH SQUARE OPENING SHALL CONSIST PREDOMINANTLY OF ROCK SPALLS AND ROCK FINES AND SHALL BE FREE OF SOIL.

TYPE B SHALL CONSIST OF SIZES SUCH THAT AT LEAST 85 PERCENT OF THE TOTAL MATERIAL BY WEIGHT SHALL BE LARGER THAN A 9 INCH SQUARE OPENING. THE MATERIAL SMALLER THAN A 9 INCH SQUARE OPENING SHALL CONSIST PREDOMINANTLY OF ROCK SPALLS AND ROCK FINES AND SHALL BE FREE OF SOIL.

TYPE C SHALL CONSIST OF SIZES SUCH THAT AT LEAST 50 PERCENT OF THE TOTAL MATERIAL BY WEIGHT SHALL BE LARGER THAN A 9 INCH SQUARE OPENING, AND SHALL BE FREE OF SOIL. THE AMOUNT OF MATERIAL PASSING A 3 INCH SIEVE SHALL BE NOT MORE THAN 15 PERCENT BY WEIGHT OF THE TOTAL MATERIAL.